

BANNERSAVER™

SPRING-LOADED LIGHT POLE BANNER BRACKET

ORDERS SHIP WITHIN 48 HOURS

BannerSaver™ is the world's original and leading performance banner bracket. In high winds, the patented spring-loaded bracket releases, reducing stress on light poles and increasing the life of banners. When the wind dies down, the banners return to their original position. BannerSaver™ is specified on six continents, in hundreds of cities and is the most specified banner bracket in the world.

HEAVY-DUTY SPRINGS

Spills 87% of wind, reducing stress on light poles and banners



BANNERS BUILT TO LAST

Vibrant 18-oz vinyl, double needle-lock stitching for extra toughness

VIEW OUR WIND TUNNEL TEST

bannersaver.com/windtunnel



HIGH-QUALITY ALUMINUM

Bombproof cast construction, resists cracks and corrosion



MULTI-SIZE VERSATILITY

Purpose-built and engineered to accommodate any size banners



WIND-TUNNEL TESTED

Cuts light pole liability and boosts your banner ROI



TIME-TESTED DESIGN

Reduces maintenance, service calls, and replacement banner costs



15-YEAR WARRANTY

Service and customer care that doesn't stop after the sale



OUR COMPETITOR'S STATIC & BREAKAWAY BRACKETS



LOW-QUALITY MATERIAL

Some manufacturers use aluminum fillers that make brackets less dense and more prone to cracks and breakage.



SHORT WARRANTY LIFE

Longer warranties imply reliability for a longer period of time and show the manufacturer's commitment to stand behind the product.




WEAK ARMS

Cheap, fiberglass support-arms designed to "breakaway" in heavy winds result in banners that constantly need rehung or replaced from rips and tears.



BEWARE OF 'WIND HOLES'

Inferior brackets often recommend wind holes, slits, or "vented banners" that actually increase vibration, meaning more stress to light poles and banner fabric.

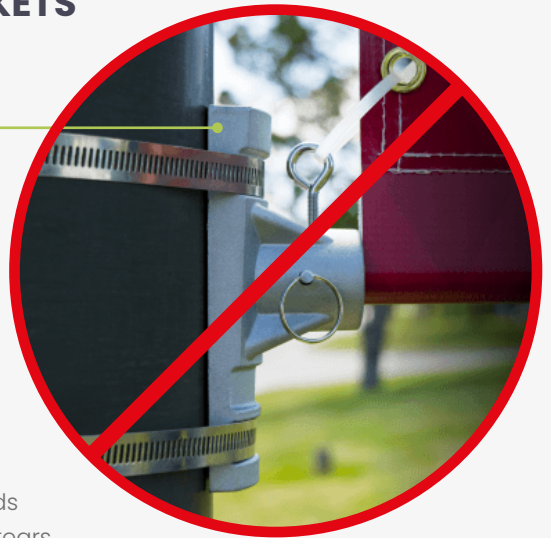

COMPARISON CHART	BANNERSAVER	KBW ARROW
Spills 87% of the wind	✓	
Loads less than 200 lbs. of force on poles	✓	
Loads more than 600 lbs. of force on poles		✓
Works with banners up 30 sq. ft.	✓	
Works with any bracket arm length	✓	
Changes banner sizes easily with minimal cost	✓	
Specified and/or Installed on six continents	✓	
Pivots in four directions	✓	

SPECIFICATIONS

Warranty	15-year
Patent Number	#5388794

STANDARD SIZES

PRODUCT	MAX BANNER SIZE
BannerSaver™ Set	Up to 20 sq. ft.
Large BannerSaver™	Up to 23 sq. ft.
XL BannerSaver™	Up to 30 sq. ft.

- Heavy banding is suggested for all installs and on square poles. It is required when installing Large and XL BannerSaver™ brackets.
- Standard banding works fine for most installations of banners up to 20 sq ft.

ACCESSORIES

Each BannerSaver™ Set Includes:

- 2 brackets with spring-tensioned assembly
- 2 black fiberglass arms with aluminum end cap
- 2 large safety pins
- 2 large plastic zip ties
- Mounting instructions

ADDITIONAL OPTIONS

- **Powder Coating** – (standard colors)t
- **Fiberglass Arm Replacement** – Standard ($\frac{3}{4}$ "
– Large/Extra-Large ($\frac{7}{8}$ "
- **Standard Banding Sets** (6 Bands Per Set)
- **Heavy Duty Banding Sets** (4 Bands Per Set)
- **Heavy Duty Branding Tool**

COMPONENTS



FIBERFLEX | ECONOMY BRACKETS

- Standard bracket designed for short-term or budget-conscious installations.



MAINTENANCE

With regular maintenance, your BannerSaver™ will last for years, protecting banners and reducing light pole liabilities. We recommend the following maintenance schedule:

- Return to the install site within 2-4 weeks of the first install to tighten bands if necessary.
- Check on banding once a quarter and/or after high wind storms. It may be necessary to tighten or replace banding from time to time.
- Note: All banding of any kind, from any company, requires maintenance. Heavy banding costs more up front but will reduce maintenance costs in the long run.

BANNERSAVER™ WARRANTY

- Britten, Inc. (“Seller”) provides a **fifteen-year limited warranty** on certain BannerSaver™ products against material defects in product design and manufacturing, as well as warranting performance of the product up to its wind-spilling capabilities as outlined in the BannerSaver™ Wind Tunnel Test Report, assuming proper installation methods and subject to the warranty limitations described herein. During this warranty period, Seller will replace or repair the BannerSaver™ bracket assembly, which includes the base bracket/nose, screw, washers, and spring. This warranty does not apply to any accessory elements of the bracket, such as the fiberglass bracket arms, safety pins, or other similar items not included as part of the bracket assembly. This warranty applies only to the original purchaser of the bracket (“Buyer”) and is in lieu of all other warranties either expressed or implied for a period of fifteen years from the date of purchase (“Warranty Period”).
- For full warranty details, please visit <https://bannersaver.com/help/warranty-information>

