





FLAGPOLE HARDWARE WITH A TWIST

There's nothing worse than seeing your beautiful and brand-perfect flag tangled wrapped around your flagpole, essentially invisible to your potential customers. Our RotoTop™ flagpoles are engineered so that flags safely rotate with the breeze. This ensures that your message is always visible, whether it is calm or windy.




ROTOTOP™ FLAGPOLES ARE PERFECT FOR:

- + Entryways
- + Parking Lots
- + Special Event Venues
- + Municipal Buildings
- + Plazas, concourses, and street side

Set-up is easy, simply fill the portable base with sand, rock or concrete, tilt the flagpole at it's hinge, and hang a your RotoTop™ flag—simple.

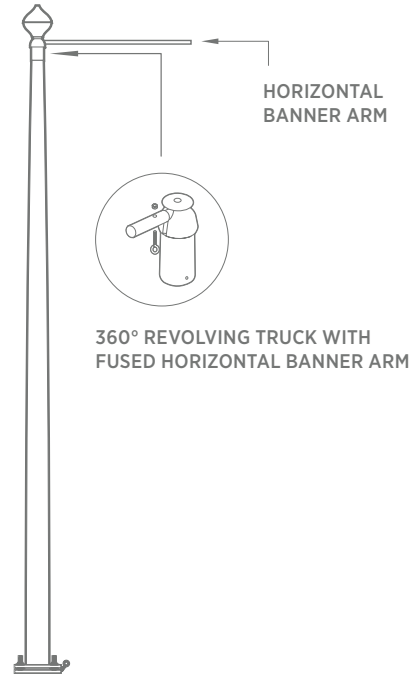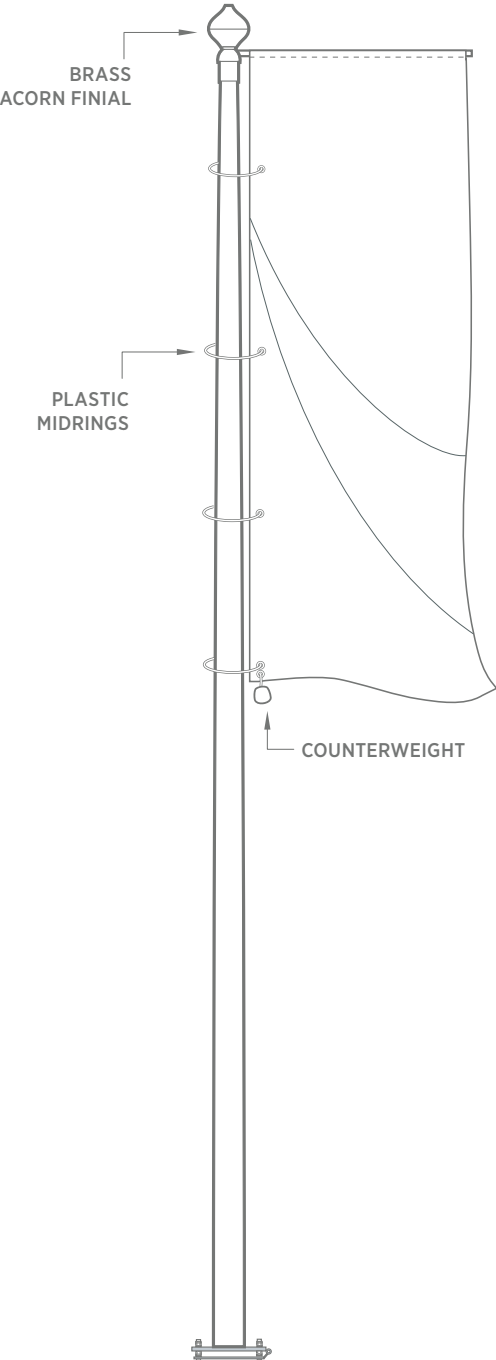

RotoTop™ Banner System Assembly					
Model#	RTCP650				
No Halyard Required	20'	25'	30'	35'	40'
HorizontalBannerArm:					
Diameter	1"	1"	1"	1"	1"
Maximum Length	60"	60"	60"	60"	60"
Vertical Banner Arm - Length	36"	36"	36"	36"	36"
Weights					
Flagpole Weight lb.	38	44	55	77	91
Hardware Kit Weight lb.	20	20	21	21	22
Shipping Weight lb.	58	64	76	98	113
Flagpole Translated Wind Strength-Unflagged					
m/s	80	80	49	65	48
km/h	288	288	176	234	173
mph	179	179	110	145	108
Fabric Allowances - Per Wind Strength					
Standard Fabric Square Footage	10'	18'	28'	40½'	50'
Maximum Fabric Square Footage	18'	28'	40½'	50'	72'

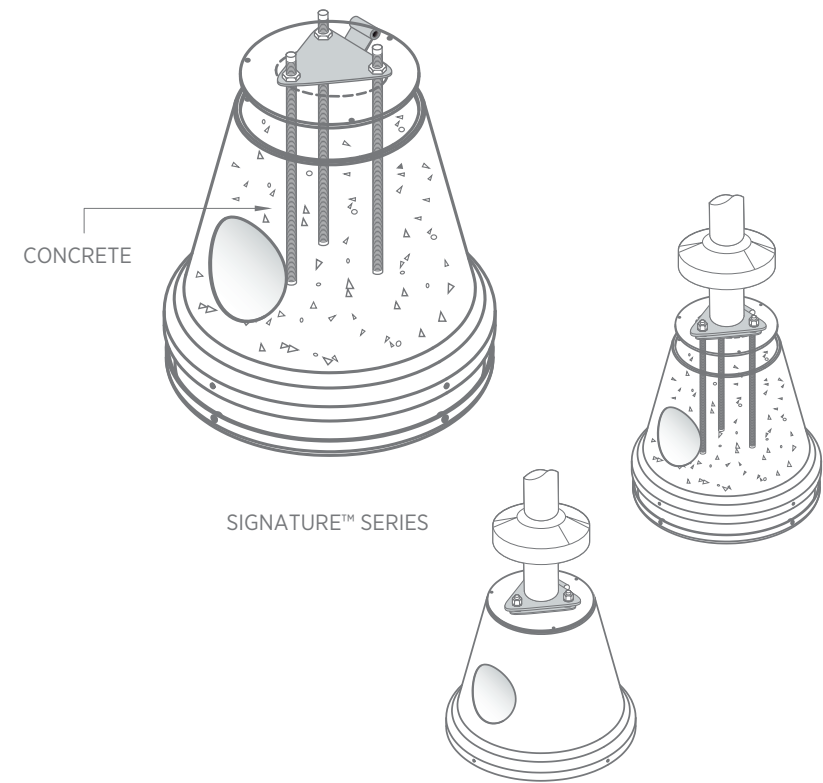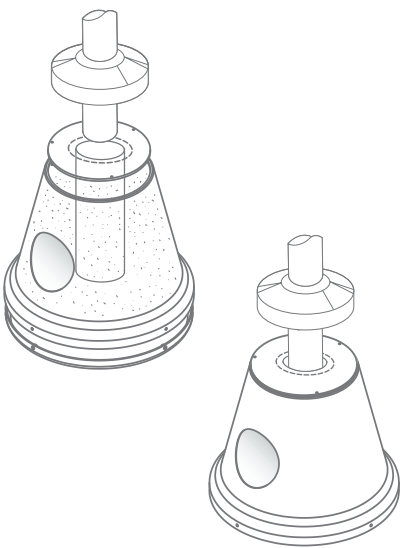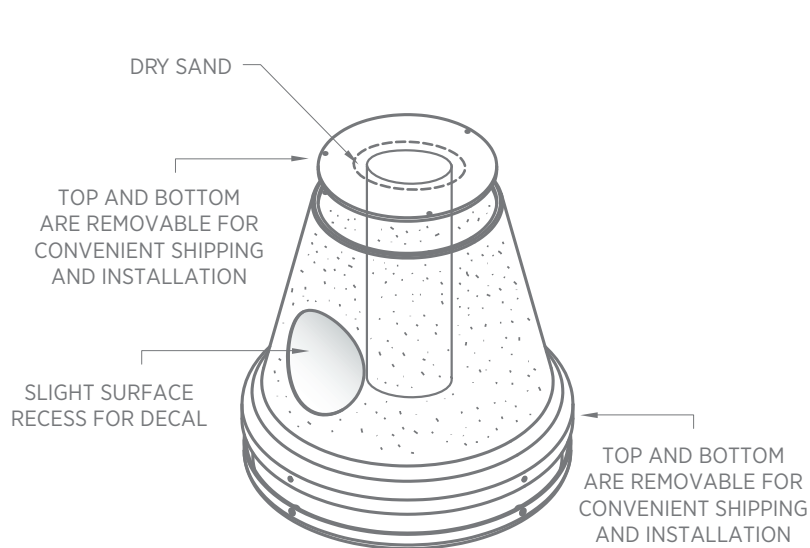

FiberCrete™ Ballast Base	
Solid Color - Model #	BBF2040
Stone Finish - Model #	BBP2040
Material:	
Linear medium density polyethylene (LMDPE).	
UV light stabilizers for long-term outdoor use.	
Stainless steel nuts and washers.	
Construction:	
½" wall thickness.	
Stable operating temperature to 140° F / 60° C.	
Overall Height:	
Top Diameter:	21.86"
Bottom Diameter:	38"
Decal Recess:	12"
Volume Capacity:	
Cubic Meters	0.5 m ³
Gallons	7½ Gallons
Litres	325 l
Weights:	
Shell Weight - Empty	40 lbs (18.14 kg)
Filled Weight - Concrete	1746 lbs (792 kg)
Filled Weight - Dry Sand	1157 lbs (525 kg)
Decal Recommendations:	
0.010" clear PSV adhesive with UV inhibitor.	
Synthetic rubber based for breathing during curing.	



ROTOTOP™ DISPLAY SYSTEMS | FAQs

How is the RotoTop™ system assembled?

Set-up is easy, simply fill the portable base with sand, rock or concrete, tilt the flagpole at it's hinge, and hang a your RotoTop flag—simple.

How easily is the base transported?

Once the portable base has been filled with sand, rock or concrete, moving the system into storage or a different location is most easily accomplished using a forklift.

What is the size of the flags?

RotoTop flags can be custom configured to nearly any size up to 14' H x 4' W.

Exact specifications are available for each system produced.

Can any substrate be used for the media?

Britten uses a high-quality flag material for outdoor applications. Contact Britten to order media at 855.763.8205.

ROTOTOP™ FLAGS | DESIGN TEMPLATES

Each RotoTop display system will be provided with its appropriate media design template.



Britten produces everything in-house, making planning and coordinating your project easier than ever. We print directly to polyester materials with eco-friendly inks for Infinity frames (and many other applications). Contact Britten to order media at 855.763.8205.