

***Specific parts may vary from photos



STEP ONE:


Locate the cross base and open the two bars so they form 90-degree angles. Ensure that the notched bar is on the bottom so the top bar sits into it.



STEP TWO:

Twist the spindle at the middle of the two arms to tighten them together.

***Additional Step for Using a Water Base** Fill the water bag through the cap and then tighten the cap down to hold in the water. Place the water base over the cross base with the spindle coming through the opening in the water base*

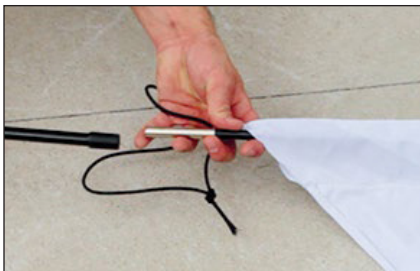

STEP THREE:

Connect the flagpole pieces together from thinnest to thickest and slide the flag onto the thin end of the pole. Feed the flag down over the entire pole.

***Additional Step for Rectangle Flag** Connect the pole pieces, but instead of using the thinnest piece, attach the Roto-Arm. Do not telescope the poles as this may cause them to break.*



STEP FOUR:

Once the flag is installed on the pole, place the bottom end of the pole down onto the spindle in the middle of the cross base.



STEP FIVE:

Find the black elastic string at the bottom of the flag and stretch it down and around the black hook at the base of the flagpole.

NEED PRINT? Britten produces everything in-house, making planning and coordinating your project easier than ever. Contact Britten to order media at **855.763.8203**.

20230117-6956